

Product Information Bulletin

News on the latest updates

PRODUCT FEATURES


HOOKLOADER HH26 CHEM – HIGH SPEED

SKU – HOOK-TL26NC-HS

Introducing our new optional High Speed feature on the HH26 CHEM model Hookloader. The High Speed model operates at up to 35% faster than the standard whilst still being at a full 26 tonne lift capacity.

Features include –

- New Oleodynamic system
- New high flow distributor bank SDS18
- Oversized tube section
- Loading and Tipping capacity – 26 Tonnes (including container)
- Tipping Angle 52° (N.C)
- 125mm Tunnel height
- Pieced modular underframe height 170mm in high tensile 10mm thick steel domex 420

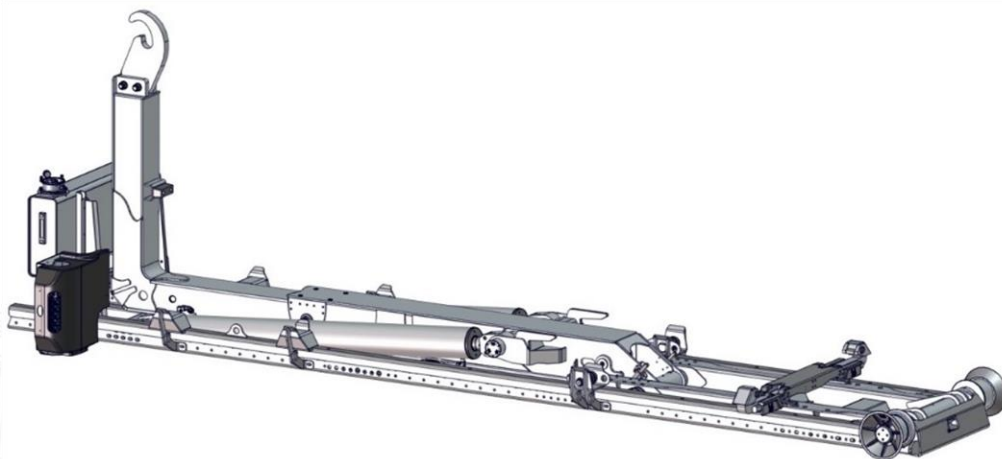

Work time comparison TL26 standard and HS version

OPERATING TIMES	STD	HS 100/LMIN	HS 120 L/MIN
UNLOADING OPERATION	72s	57s	46s
LOADING OPERATION	59s	52s	40s
TIPPING OPERATION	67s	54s	45s
RETURN FROM OPERATION	52s	43s	36s

*Times stated are based off a particular specification of vehicle and equipment set up. These may vary depending on individual specification

Date of Issue – 20/01/20
Issue #2